Product code

CGT6

Face Fix Slide Veneer Tie

Product datasheet

View product online

Download 2D CAD (DXF)

Face fix slide veneer tie. For fastening masonry to new or existing structures.
*install flush with clay bricks and 15mm clearance with other types of masonry.

Corrosion class	R2 (+2 options)
Material	Galvanised Z600

Features

- Clay brick
- Maximum cavity 125mm
- Medium & heavy duty
- Universal applications
- Australian design & tested AS/NZS 2699.1:2020

Technical details

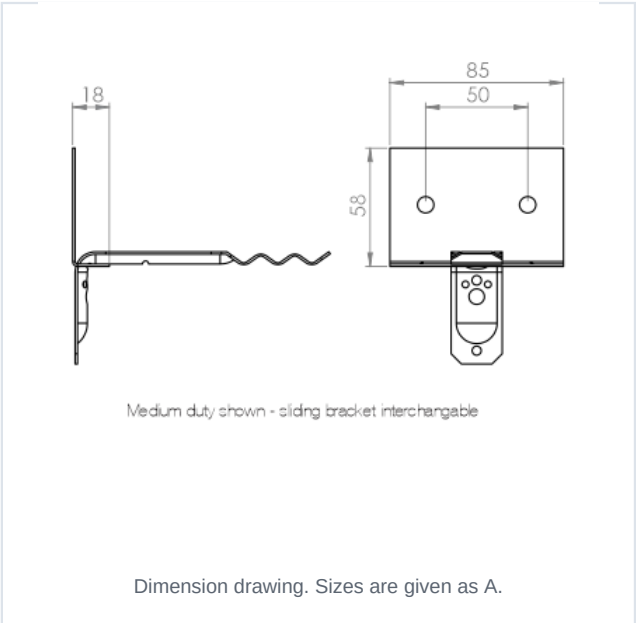

Dimension drawing. Sizes are given as A.

Fixing requirements

Concrete	60mm x 6mm dia AM premium concrete screw
Concrete	32mm x 5mm dia Mushroom spikes head anchor
Metal / Timber	Cerra Multipurpose Screw hex head 10g X 35mm

Corrosion characteristics

R2	Galvanised Z600
R3	Hot dipped galvanising
R4	Stainless steel 316L

Conforms to corrosion resistance set by AS/NZS 2699 / AS 3700.

Ordering information

Choose one option from each column to build the order code, then give us the code and the quantity you need.

Example order code

CGT6-MD-R2

Product code	Duty	Material – Corrosion class
CGT6 Face Fix Slide Veneer Tie	**-MD** Medium duty **-HD** Heavy duty	**-R2** Galvanised Z600 **-R3** Hot dipped galvanising **-R4** Stainless steel 316L
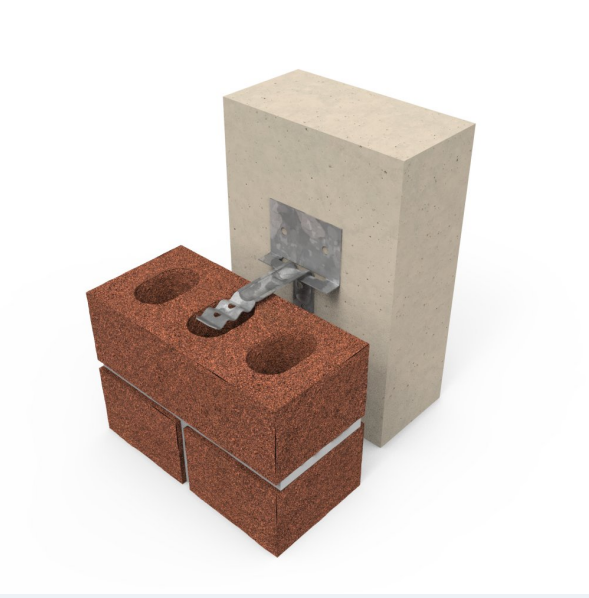
Installation