Product code

CGT8

Face Fix Slide Veneer Tie

Product datasheet

View product online

Face fix slide veneer tie. For fastening masonry to new or existing structures. Install flush with clay bricks and15mm clearance with other types of masonry.

Corrosion class	R2 (+2 options)
Material	Galvanised Z600

Features

- Clay brick
- Maximum cavity 125mm
- Medium & heavy duty
- Universal applications / remedial
- Australian design & tested AS/NZS 2699.1:2020

Technical details

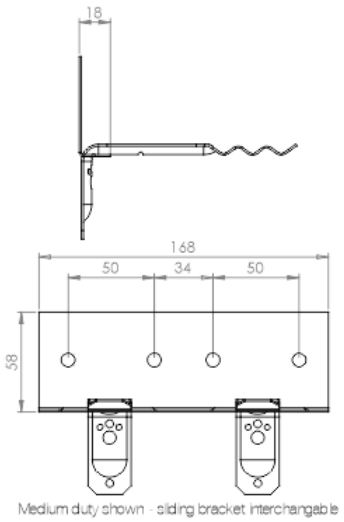

Dimension drawing. Sizes are given as A.

Fixing requirements

Concrete	60mm x 6mm dia AM premium concrete screw
Concrete	32mm x 5mm dia mushroom spikes head anchor
Metal / Timber	Cerra Multipurpose Screw hex head 10g X 35mm

Corrosion characteristics

R2	Galvanised Z600
R3	Hot dipped galvanising (special order)
R4	Stainless steel 316L (special order)

Conforms to corrosion resistance set by AS/NZS 2699 / AS 3700.

Ordering information

Choose one option from each column to build the order code, then give us the code and the quantity you need.

Example order code

CGT8-MD-R2

Product code	Duty	Material – Corrosion class
CGT8 Face Fix Slide Veneer Tie	**-MD** Medium duty **-HD** Heavy duty	**-R2** Galvanised Z600 **-R3** Hot dipped galvanising **-R4** Stainless steel 316L

Installation