
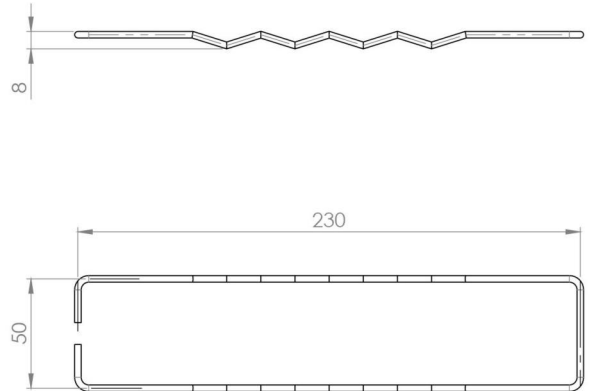


## Medium Duty Cavity Wall Tie

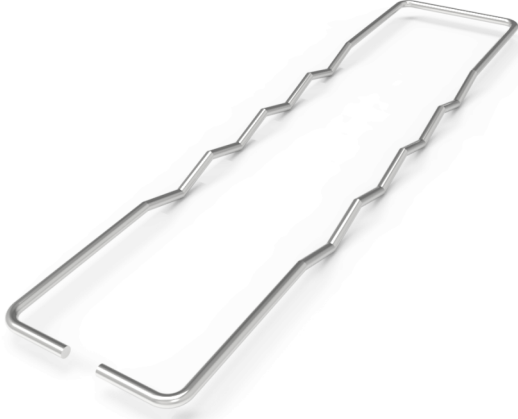

### DESCRIPTION

The FIX-120-DLEG-304 GRADE is a medium-duty cavity wall tie manufactured from 304-grade stainless steel for superior corrosion resistance and long service life. Its double-leg design ensures a secure, stable connection between masonry leaves, while the integrated drip feature prevents moisture from bridging the cavity. Designed for reliable load transfer, this tie meets the long-term durability requirements of modern masonry systems.

### FEATURES

- Clay brick / clay brick or clay brick / block work
- Maximum cavity 120mm
- Excellent for corrosion protection with marine environments
- Unlike galvanized wire, this product's self-repairing chromium oxide layer provides exceptional, long-lasting corrosion resistance.
- Universal applications

### CORROSION

- Material: Stainless steel 304 (R3)

### ADDITIONAL CORROSION


Conforms to corrosion resistance set by AS/NZS 2699.2:2020 / AS 3700.

### ORDERING INFORMATION

When ordering please supply use with the part number and quantity you require

**FIX-120-DLEG-304 GRADE**

PRODUCT CODE

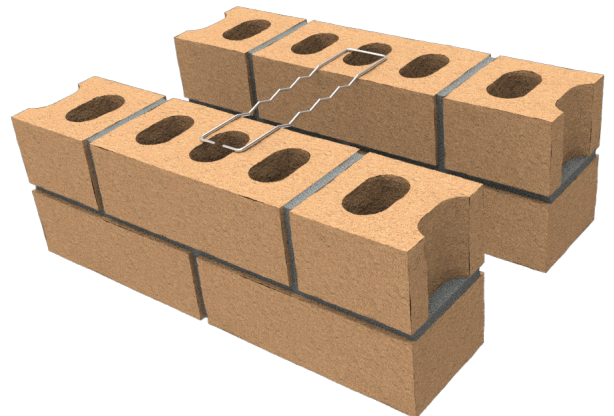

## Medium Duty Cavity Wall Tie

### LIFE CYCLE

Rated R3 for corrosion protection, resulting in a 50% improvement in lifecycle expectancy over typical galvanized materials.

### TESTING INFORMATION

| AS/NZS 2669.1:2020                     | FIX-120 DLEG 304 GRADE (120mm Gap) Mean (Range) |
|--|---|
| Tested in Compression - Mean Load (kN) | 1.66 (1.40 - 1.90)                              |
| Tested in Tension - Mean Load (kN)     | 1.49 (1.39 - 1.57)                              |

### PACKAGING

125 Total Pcs - 5pk x 25 Pcs