
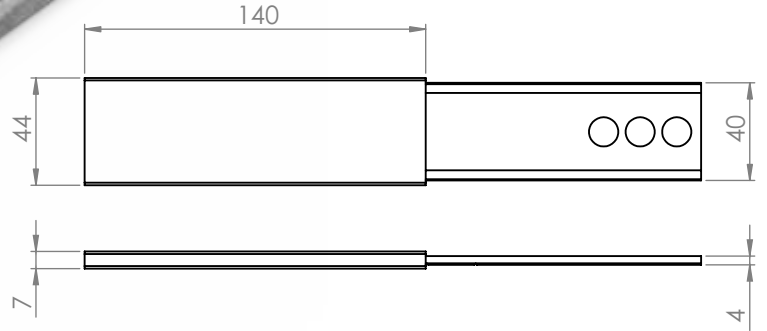


# High Strength Vertical Control Gap Tie

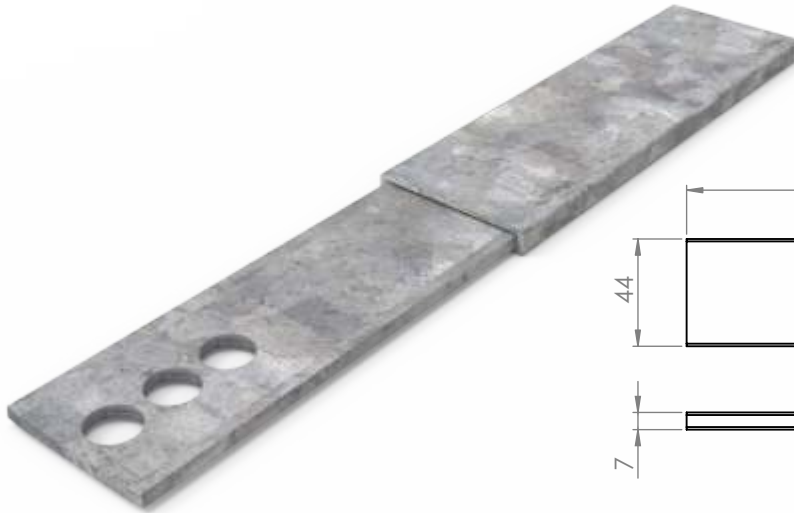

## DESCRIPTION


Vertical control gap tie for brick and block work. This tie will retain masonry integrity against lateral wind loads, de bonding slide will absorb differential movement.

## FEATURES

- Clay brick / block work
- Increased bond strength
- High strength vertical control gap tie
- Tested to a control gap of 20mm
- Universal applications
- Australian design & tested AS/NZS 2699.2:2020

## CORROSION CHARACTERISTICS

Hot dipped galvanising (R3)  
 Stainless steel 316L (R4)  
 Conforms to corrosion resistance set by AS/NZS 2699.2:2020 / AS 3700.

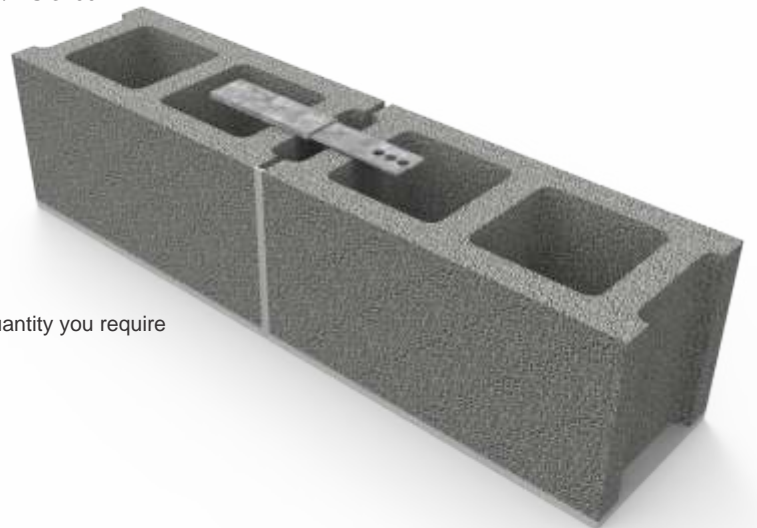

## ORDERING INFORMATION

When ordering please supply use with the part number and quantity you require

**SLIDE-SD01-R4**

PRODUCT CODE

MATERIAL

Specify  
**R3** for Hot dipped galvanised  
**R4** for Stainless steel 316L

Datasheet